


SS196 Series

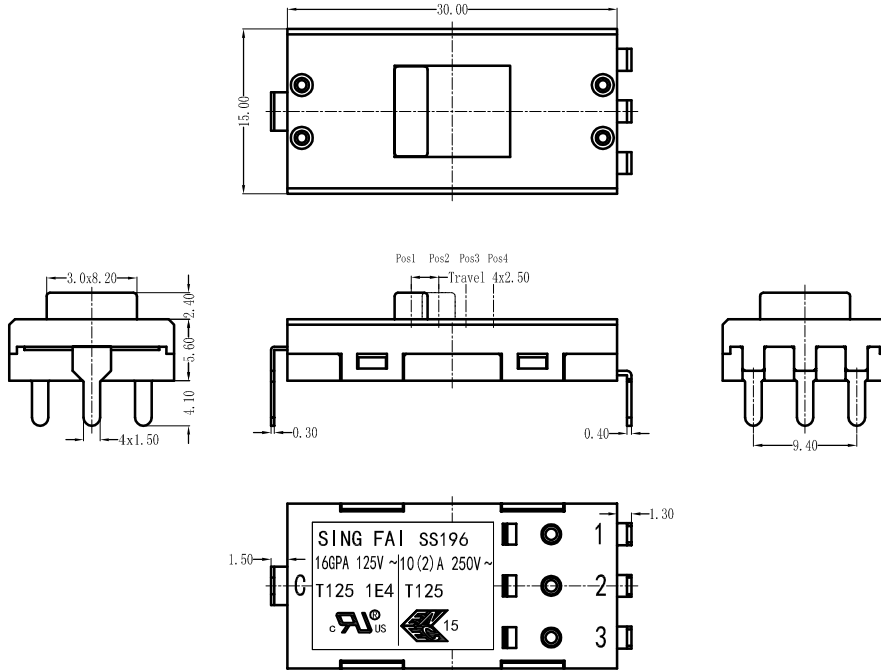

SS196

-03



-16

-1

-S

Function
01
02
04
05
06
07
08
09
More

Current
16 10(2)A 250V a.c.
16GPA 125V a.c.



Function Options:

Circuit 01	Circuit 02	Circuit 03	Circuit 04	Circuit 05	Circuit 06	Circuit 07	Circuit 08	Circuit 09	Circuit 10	Circuit 11	Circuit 12	Circuit 13	Circuit 14	Circuit 15
Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected
1 OFF	1 OFF	1 OFF	1 OFF	1 OFF	1 OFF	1 OFF	1 OFF	1 OFF	1 OFF	1 OFF	1 OFF	1 OFF	1 OFF	1 OFF
2 C+1	2 C+1+2+3	2 C+3	2 C+2	2 C+3	2 C+1+3	2 C+1	2 C+1	2 C+1	2 C+3	2 C+3	2 C+1	2 C+1	2 C+1	2 C+2+3
3 C+2	3 C+2+3	3 C+2+3	3 C+1+2	3 C+1+2	3 C+2+3	3 C+1+2	3 C+1+2	3 C+2+3	3 C+1+2	3 C+2+3	3 C+2	3 OFF	3 C+1+2+3	3
4 C+3	4 C+3	4 C+1+2+3	4 C+1+2+3	4 C+1+3	4 C+3	4 C+2	4 C+1+2+3	4 C+3	4 C+3	4 C+2+3	4 OFF	4 C+1+2	4 C+3	4

Circuit 16	Circuit 17	Circuit 18	Circuit 19	Circuit 20	Circuit 21	Circuit 22	Circuit 23	Circuit 24	Circuit 25	Circuit 26	Circuit 27	Circuit 28	Circuit 29	Circuit 30
Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected	Pos. Connected
1 OFF	1 C+1	1 C+1	1 C+1	1 OFF	1 OFF	1 OFF	1	1 OFF	1 C+1+2+3	1 OFF	1 OFF	1 OFF	1 OFF	1 OFF
2 OFF	2 C+1+2+3	2 OFF	2 C+1+2+3	2 C+1	2 C+1	2 C+2	2	2 C+3	2 C+1+2	2 C+1+3	2 C+1	2 C+1	2 C+2+3	2 C+2
3 C+2	3 C+1+2	3 C+2	3 C+2	3 C+1+2	3 C+2	3 C+1+3	3	3 C+2	3 C+1	3 C+1	3 C+1+2	3 C+1+2+3	3 C+2	3 C+1+3
4 C+1+2	4 OFF	4 C+1+2+3	4 OFF	4 C+3	4 C+1+3	4 C+3	4	4 C+1+2+3	4 OFF	4 C+1+2+3	4 C+1+3	4 C+1+3	4 C+1+2+3	4 C+1+2+3