


# MS175 Series

## Safety Approval & Specification

16GPA 125V a.c.	T130	15(3)A 250V a.c. T125	15(3)A 250V a.c. T125
10GPA 125V a.c.	T125 T85 1E4		
6GPA 125V a.c.			

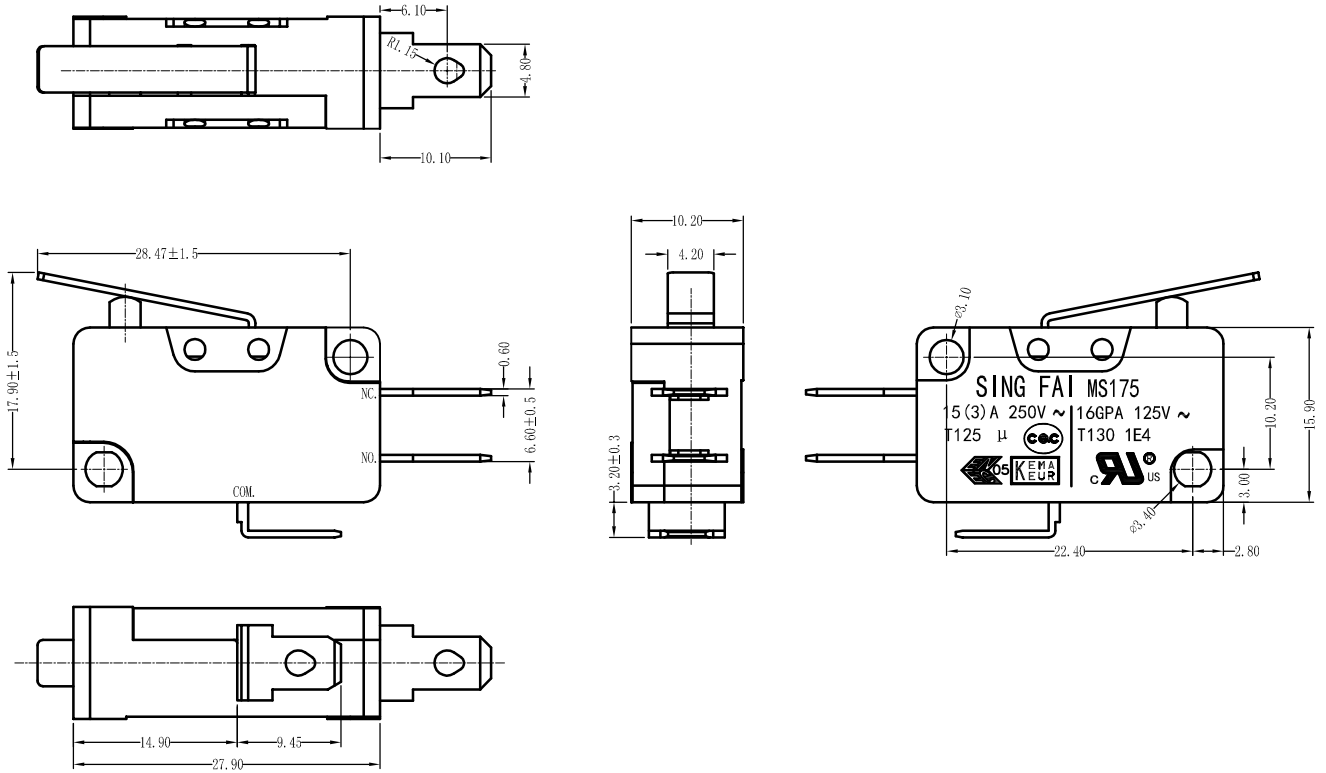

## MS175 -F -16 -T130 -F270 -LE -A

Function		Current	Temperature	Operating force	Handle Type	Terminal Type
D	(ON)-OFF Push ON	16A 125V a.c.	T85 T85	F270 270 g.f	O	A
E	(OFF)-ON Push OFF	/8A 250V a.c.	T125 T125		LA	A
F	(ON)-ON	15(3)A 250V a.c.	T130 T130		LB	B
		16GPA 125V a.c.			LD	C
		10GPA 125V a.c.			LE	C
		6GPA 125V a.c.			LF	D
					LG	D
					LH	
					LJ	