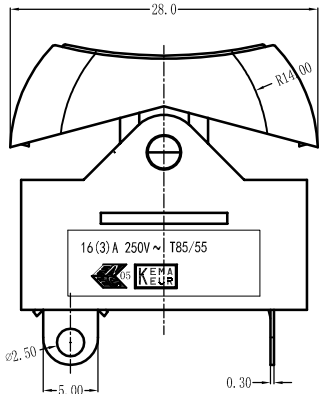
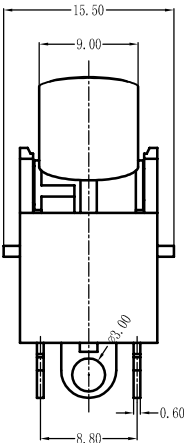
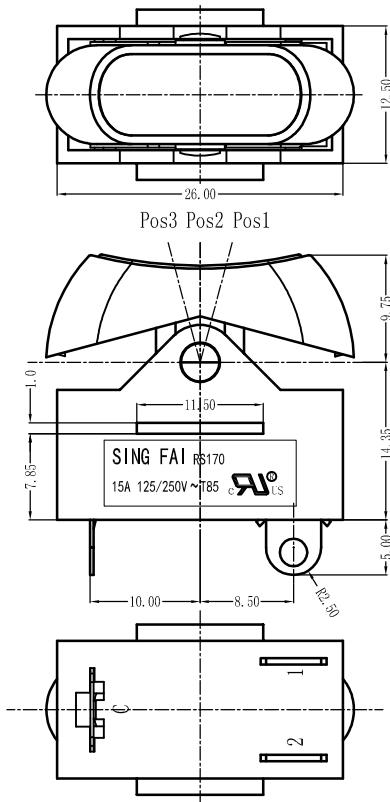














RS170 Series

Safety Approval & Specification

 UL1054		
15A 125/250V a.c. T85	16(3) 250V a.c. T85 1E4 10(2) 250V a.c. T85 5E4	



RS170 -K -16 -1 -1 -K -K -0 -0 -0

Function		Current	Base Type	Button Type	Base Color		Button Color		Printing		Color of Printing		Terminal type			
A	OFF-ON ₁₊₂	16(3)A 250V a.c. T85/55		0	None	K	Black	K	Black	0	None	O	None			
C	ON ₁ -OFF-ON ₂	16(2)A 250V a.c. T85/55		1		K	Black	K	Black	M35		W	White			
C1	ON ₁ -OFF-ON ₁₊₂	15A 125/250V a.c. T85		2								W	White			
K	OFF-ON ₁ -ON ₁₊₂			3	园头					GR	Green	M36		R	Red	扭30度
W	ON ₁ -ON ₂ -ON ₁₊₂			4						BL	Blue			BL	Blue	
W1	ON ₂ -ON ₁ -ON ₁₊₂			5						OR	Orange			YE	Yellow	
M	ON ₁ -OFF-(ON ₂)									M37						
X	(ON ₁)-OFF-(ON ₂)															
Q	OFF-ON ₁ -(ON ₁₊₂)									M38						
T	(ON ₁)-ON ₂ -ON ₁₊₂															
U	ON ₁ -ON ₂ -(ON ₁₊₂)										M41					
U1	ON ₂ -ON ₁ -(ON ₁₊₂)															
V	(ON ₁)-ON ₂ -(ON ₁₊₂)									M42						
										M44						
										M48						
										M49	